

PRESTIGE SERIES

PR 60

CLEARLY SUPERIOR



Glass Type (All 1/4")	Single Pane Clear		Double Pane Clear	
	Transmitted	Reflected	Transmitted	Reflected
Visible Light	60%	36%	54%	32%
Total Solar Energy Rejected — On Angle	53%	61%	46%	54%
Infrared Rejected*	97%	97%	97%	97%
Visible Light Reflected Int.	8%	7%	11%	10%
Visible Light Reflected Ext.	8%	6%	15%	8%
UV Rejected	99.9%	99.9%	99.9%	99.9%
Glare Reduction	32%	32%	32%	32%
Solar Heat Gain Coefficient	0.47	0.41	0.54	0.41
U Value	0.99	0.99	0.47	0.47
Luminous Efficacy	1.3	0.9	1.0	0.8

*See reverse





Renewable Energy Division


3M Center, Building 235-2S-27
St. Paul, MN 55144-1000
© 3M 2011 70-0709-0159-53 (2/11)



3M Sun Control Window Films

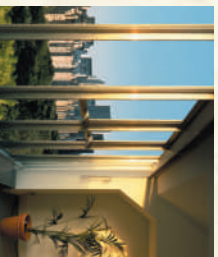

Exterior View



Interior View



The Skin Cancer Foundation recommends using 3M Window Film products as an effective UV protectant.

PRESTIGE SERIES

PR 60

CLEARLY SUPERIOR



PR 60 Benefits:

- Substantial heat rejection provides energy savings and enhanced comfort, combined with a clear film
- Increased on-angle heat rejection provides additional performance benefits
- Low reflection enhances views and overall beauty
- No metals: 3M technology provides superior performance with no corrosion or interference with cell phone signals
- Extends the life of furnishings by rejecting UV rays, the single largest component of fading
- Premium 3M manufacturer's warranty
- Reduces glare and eye discomfort
- Increases personal safety by minimizing flying glass

Performance Results:

Visible Light Transmitted	60%
Total Solar Energy Rejected — On Angle	53%
Infrared Rejected*	97%
Visible Light Reflected Int.	8%
Visible Light Reflected Ext.	8%
UV Rejected	99.9%
Glare Reduction	32%
Luminous Efficacy	1.3

Performance data generated for a typical film on orn glass using applicable industry test methods and standards.
*Infrared rejection measured as film only from 900nm–1000nm.